


## NOTES

- DO NOT SCALE.
- UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES
   AND ALL INVERTS IN METRES AOD.
- 3. ALL CIVIL WORKS IS THE RESPONSIBILITY OF THE DEVELOPER OR CONTRACTOR INCLUDING FIXING OF STEELWORK SUCH AS ACCESS COVERS AND PENSTOCKS ETC. INSTALLATION OF CABLE DUCTS, BENCHING AND MAKING GOOD AROUND PIPES AFTER INSTALLATION.
- 4. REINFORCING BARS ARE TO BE A MINIMUM OF 75MM BELOW THE SURFACE. ANY STRUCTURAL DETAILING / CIVIL WORKS SHOWN SHOWN ON THIS DRAWING ARE ILLUSTRATIVE ONLY UNLESS OTHERWISE STATED AND SHOULD NOT BE USED FOR
- BENCHING IS TO BE FORMED AFTER PUMP INSTALLATION AND TO BE IN ACCORDANCE WITH THE APPLICABLE SEWERS FOR ADOPTION AND ADOPTING AUTHORITY SPECIFICATION.
- UNLESS OTHERWISE STATED, ALL DUCTS ARE TO BE Ø100MM AND BE COMPLETE WITH DRAW ROPES. SERVICE DUCTS TO BE TO THE UTILITY SUPPLIERS SPECIFICATION.
- DUCT ROUTES ARE SHOWN DIAGRAMMATICALLY ONLY. ALL DUCTS LAID IN THE MOST DIRECT ROUTE TO SUIT THE SERVICE BEING CARRIED AVOIDING ANY ACUTE CHANGES OF DIRECTION.
- LEVEL CONTROL POSITIONS ARE SHOWN DIAGRAMMATICALLY ONLY.
  THEY WILL BE POSITIONED AWAY FROM OBSTRUCTIONS AND BE
  READILY ADJUSTABLE AFTER INSTALLATION.

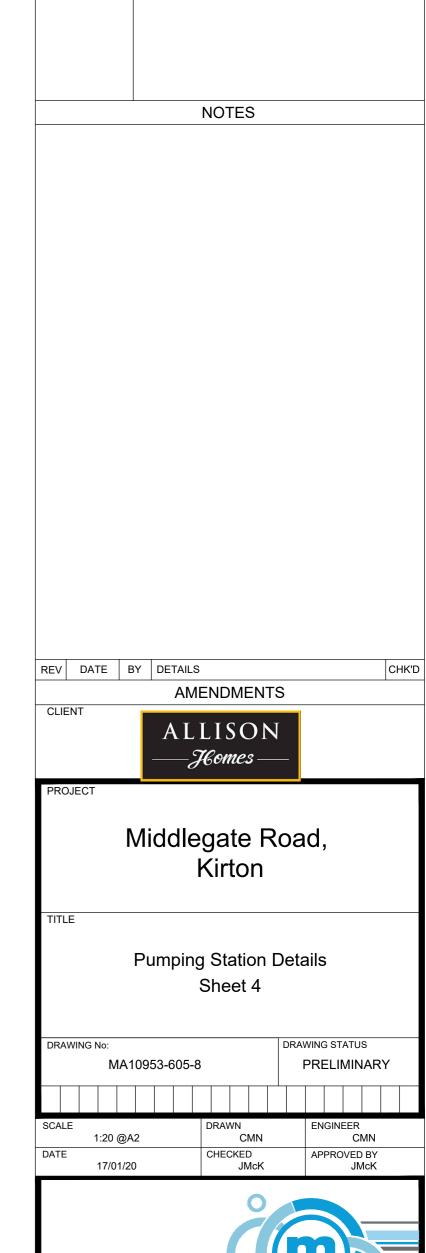

ASSOCIATED DRAWINGS

No.

TITLE

