# Door schedule – Roads Farmhouse

### Ground Floor

Secured Fla								
Bround Flo	lor							 -
			16.8m					
		WC						
		Utility Room	+		-			
	Conservatories			Cloakroom			 	
1				land the second				
7.00								
7.7m								 
	Kitchen	Dining Room/Reception						
						A		
							Corridor	 
						Stairs		13n
-								
								-
	- 5m							
				145			Room 2	
					5.3m			
								 -
	2 m							
							5.5	 




Room 2 door – presumed original/historic door

#### Proposed modification

Door to be retained in situ. Modify door to correctly fit frame, remove existing self-adhesive strips, rebate door supply and install intumescent strips and cold smoke seals. Retain door hinges. Overpaint with white intumescent paint and white top coat to match frames. Replace modern overhead door closer with fire rated alternative.

Corridor door – modern door

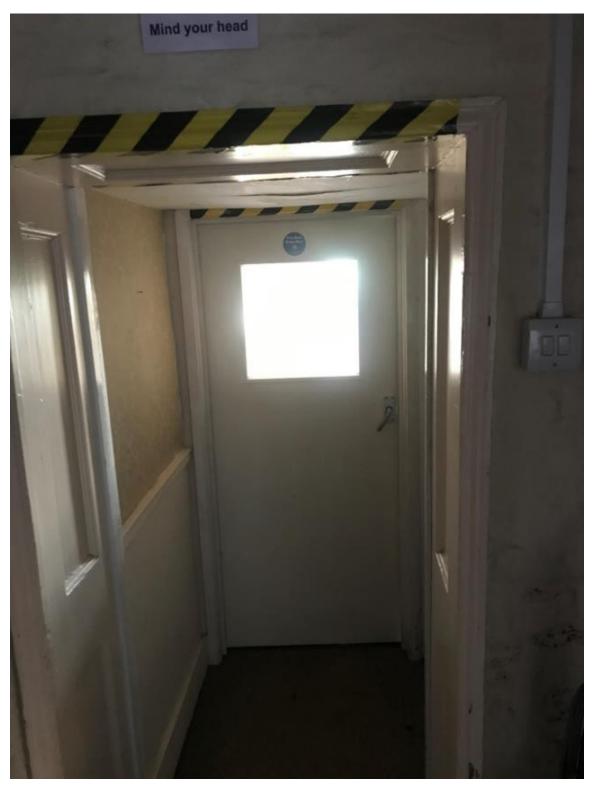

Proposed modification

To supply and install new part glazed FD30 rebate door supply and install intumescent strips and cold smoke seals, fire rated door hinges, intumescent hinge paper, new overhead door closer and adjust. Kitchen door – modern door



Proposed modification

Supply and install new nonglazed FD30 rebate door supply and install intumescent strips and cold smoke seals, fire rated door hinges, intumescent hinge paper, new overhead door closer and adjust.

# <u>First floor</u>


loads Farm	house, Frampt	on					 		 	-
irst Floor								_		
		16.8m								
			N	VC						
	Bathroom		-			Room 4		_	 	
					-					
			1							
7.7m									 	
		Room 3			Contraction of Contraction of Contraction			_	 	-
						Corridor				
	+		~				13m			
					Stairs					
l-					the second s				 	
	- free and the second									
						Room 5				
1				5.3m			 		 	
	2									-
	2 m									
						5.5	 			



Room 3 door – presumed original/historic door

Proposed modification


Door to be retained in situ. Modify door to correctly fit to frame, remove existing selfadhesive strips, rebate door supply and install intumescent strips and cold smoke seals. Retain door hinges. Overpaint with intumescent paint and white top coat to match frames. Replace modern overhead door closer with fire rated alternative.

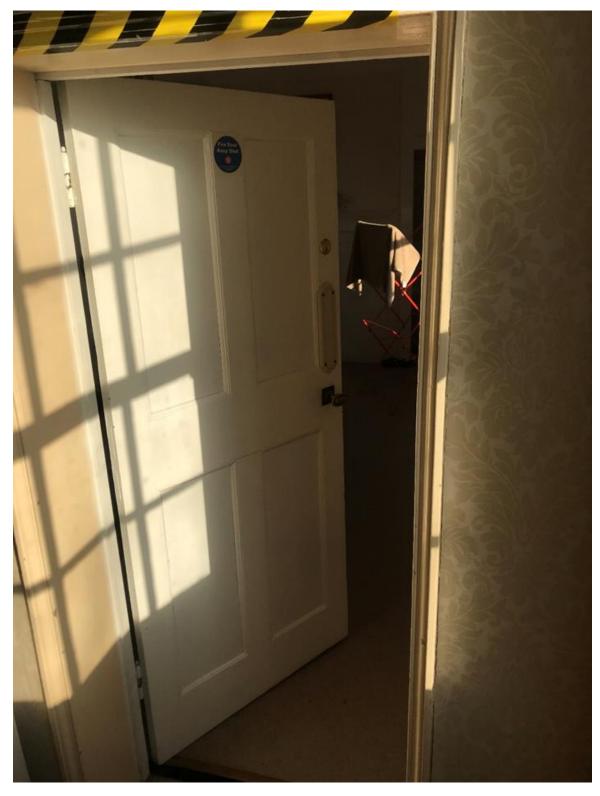

Room 4 door – presumed original/historic door

Proposed modification

Door to be retained in situ. Modify door to correctly fit to frame, remove existing selfadhesive strips, rebate door supply and install intumescent strips and cold smoke seals. Retain door hinges. Overpaint with intumescent paint and white top coat to match frames. Replace modern overhead door closer with fire rated alternative.

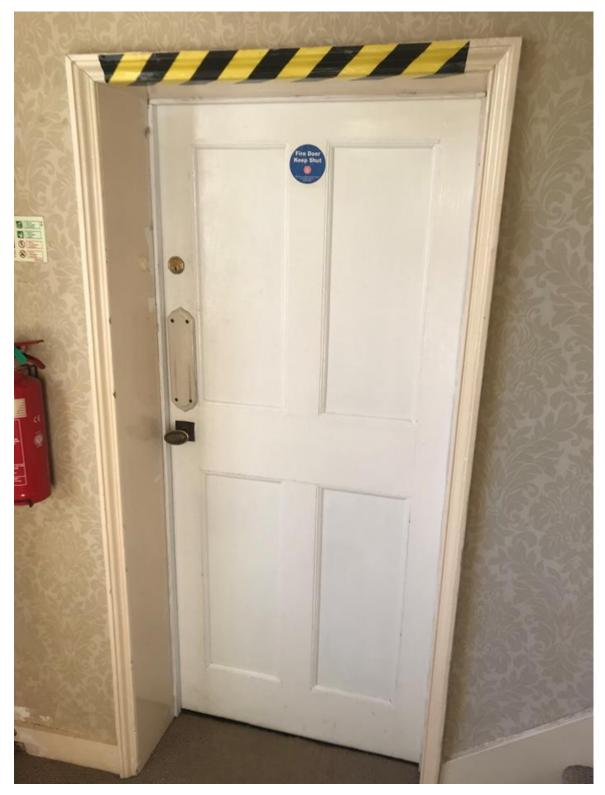


Room 5 door – presumed original/historic door


Proposed modification

Door to be retained in situ. Modify door to correctly fit to frame, remove existing selfadhesive strips, rebate door supply and install intumescent strips and cold smoke seals. Retain door hinges. Overpaint with intumescent paint and white top coat to match frames. Replace modern overhead door closer with fire rated alternative.

## Second floor

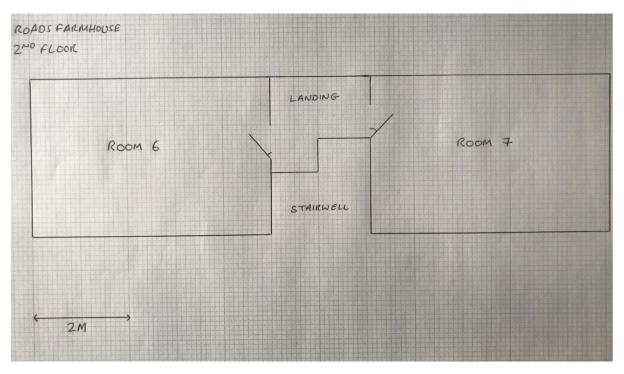


Room 6 door – Possible historic door

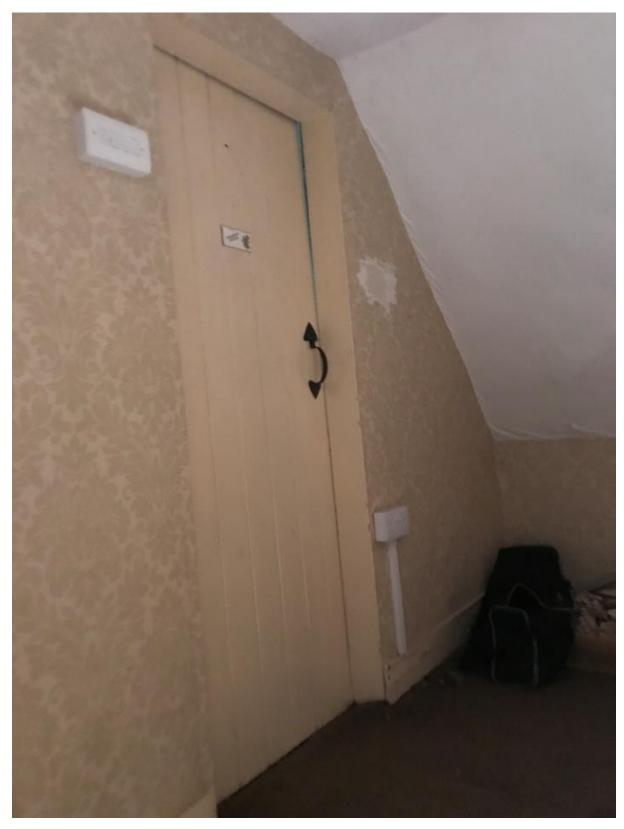

Proposed modification

Door to be retained in situ. Modify door to correctly fit to frame, rebate door supply and install intumescent strips and cold smoke seals. Retain door hinges. Overpaint with intumescent paint and top coat to match frames. Add overhead door closer.

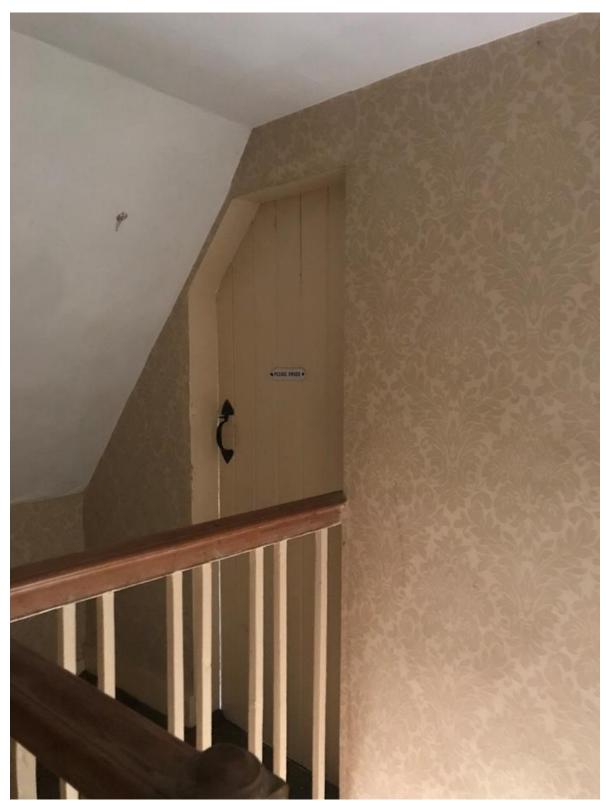

Room 7 door – possible historic door

Proposed modification

Door to be retained in situ. Modify door to correctly fit to frame, rebate door supply and install intumescent strips and cold smoke seals. Retain door hinges. Overpaint with intumescent paint and top coat to match frames. Add overhead door closer.